




FLP 500

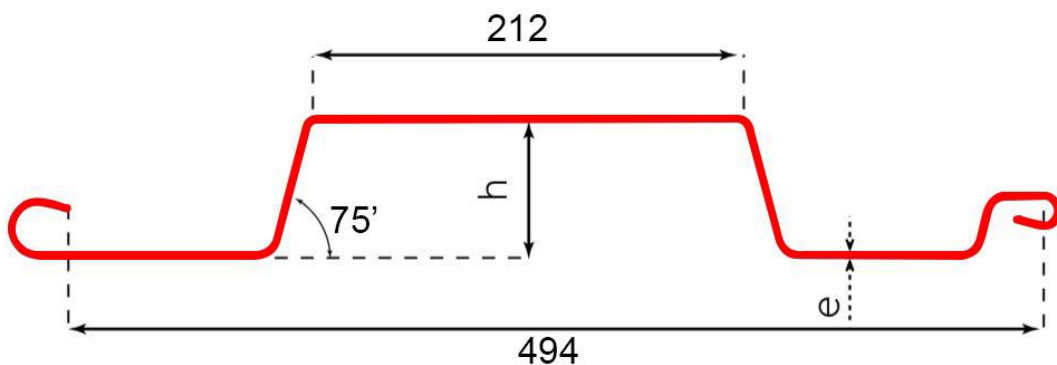

	THICKNESS	DEPTH	EFFECTIVE WIDTH	WIDTH	ANGLE	MASS		MODULAR SECTION	MOMENT OF INERTIA
	(MM)	(MM)	(MM)	(MM)	(°)	KG/ML	KG/M ²	(CM ³ /ML)	(CM ⁴ /ML)
SINGLE PILE	5	74	494	229	75	28.02	56.72	156	621
SINGLE PILE	6	75	494	231	75	33.53	67.88	186	747

The interlocking trench sheets with a wider width are used to support earth banks and are ideal for permanent reinforcement of waterway banks, service trenches and under bridges where height is restricted